









-  EN1143-1
Burglary protection
-  EN15659
Fire protection (option)
-  VdS
Grade VKB
-  ECB-S
Grade VKB
+ LFS60P (option)
-  ISO
Class EN 6
-  DIN
4102 (light fire protection)



-  Domestic insurable
by arrangement
-  Commercial insurable
up to EUR 375.000

Fig. Safe EWS1600KB, hinge right
E-Lock Kaba Code Combi B, K-Lock S+G 1 key guide tube 2 bits, 1 inside locker, 1 shelf

Model	Outside dimensions h x w x d (mm)		Inside dimensions h x w x d (mm)		SH	Volume (l)	Weight (appr. kg)
EWS0849KBR	848 x	645 x 565	695 x	495 x 320	1	110	665
EWS0850KBR	848 x	810 x 725	695 x	660 x 480	1	220	935
EWS1000KBR	1003 x	810 x 725	850 x	660 x 480	2	269	1060
EWS1200KBR	1193 x	810 x 725	1040 x	660 x 480	2	329	1220
EWS1600KBR	1538 x	810 x 725	1385 x	660 x 480	3	439	1505
EWS1901KBR	1883 x	810 x 725	1730 x	660 x 480	4	548	1790
EWS1903KBR	1883 x	1110 x 725	1730 x	960 x 480	4	797	2230
EWS1902KB	1883 x	1110 x 725	1730 x	960 x 480	4	797	2270
EWS1904KB	1883 x	1415 x 725	1730 x	1265 x 480	4	1050	2720

SH = Shelf

Please add 60 mm to the listed outside depth for mountings.

[Safes]


[Type EWSKB]

In addition to the EWS series features, EWSKB series safes provide additional protection against burglars armed with diamond core drills thanks to their special structural wall design. Safes weighing less than 1.000 kg must be anchored.

[Product information]

- Hinge** DIN right – model designation R (EWS1902KB, EWS1904KB double-doored)
option: DIN left
- Door opening angle** 180°
- Body** double-walled, reinforced, with core drill protection, filled with armoured, high resistant barrier material
- Door structure** triple-walled, reinforced, with core drill protection, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
- Locking mechanism** three-way moving boltwork with large steel bolts, protected by glass plate with additional emergency re-lockers, fix engaging steel bolts on the hinge side
- Anchoring** fitted for floor anchoring
anchoring bolts and shields are supplied for EWS0849KB, EWS0850KB
option: additional anchoring holes (customer specifies position)
- Alarm connection** VdS-certified cable channels to allow connection to a burglar alarm system
- Colour** outside RAL 7035 light grey + RAL 7045 tele grey1, inside RAL 7035 light grey
option: special colour according to RAL
- Lock** safes in grades IV and higher have to be equipped with at least 2 certified locks
any set of locks (from VdS class 2 up) is possible
- Equipment** shelf adjustable (height setting 69 mm, EWS0849 60 mm)
option: additional shelf, inside locker
option (from EWS0850KB up): drawer, pull-out shelf
- Accessories** option: fire protection door rebate seals, alarm switch set, interior lighting
- Option** additional certified fire protection LFS60P – except models:
EWS0849KB, EWS1902KB, EWS1904KB
bolted version – assembly on site
from Model EWS1000KB up (not possible in combination with certified fire protection)

[Equipment options]

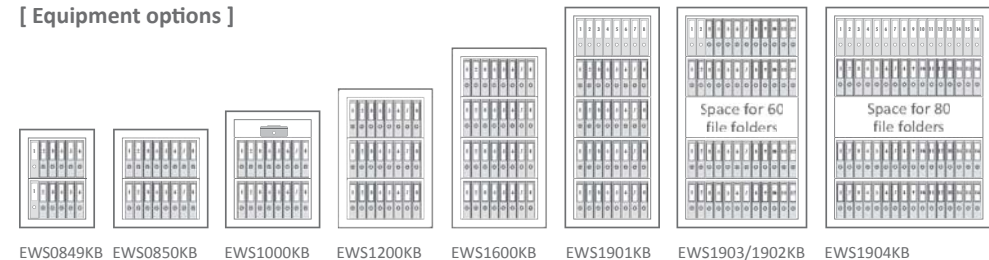

EWS0849KB EWS0850KB EWS1000KB EWS1200KB EWS1600KB EWS1901KB EWS1903/1902KB EWS1904KB